

Internet Engineering Task Force
Internet-Draft
Intended status: Standards Track
Expires: October ~~17~~ 7, 2018

F. Maino, Ed.
Cisco
J. Lemon
Broadcom
P. Agarwal
Innovium
D. Lewis
M. Smith
Cisco

~~March 30~~
April 5, 2018

LISP Generic Protocol Extension
~~draft-ietf-lisp-gpe-02~~
draft-ietf-lisp-gpe-03

Abstract

This document describes extending the Locator/ID Separation Protocol (LISP) Data-Plane, via changes to the LISP header, to support multi-protocol encapsulation.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on October ~~17~~ 7, 2018.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	2
1.1. Conventions	3
1.2. Definition of Terms	3
2. LISP Header Without Protocol Extensions	3
3. Generic Protocol Extension for LISP (LISP-GPE)	3
4. Backward Compatibility	4
4.1. Use of "Multiple Data-Planes" LCAF to Determine ETR	

LISP Header

3. Generic Protocol Extension for LISP (LISP-GPE)

This document defines the following changes to the LISP header in order to support multi-protocol encapsulation:

P Bit: Flag bit 5 is defined as the Next Protocol bit. The P bit MUST be set to 1 to indicate the presence of the 8 bit next protocol field.

P = 0 indicates that the payload MUST conform to LISP as defined in [I-D.ietf-lisp-rfc6830bis]. Flag bit 5 was chosen as the P bit because this flag bit is currently unallocated.

Next Protocol: The lower 8 bits of the first 32-bit word are used to carry a Next Protocol. This Next Protocol field contains the protocol of the encapsulated payload packet.

LISP uses the lower 24 bits of the first word for either a nonce, an echo-nonce, or to support map-versioning [RFC6834]. These are all optional capabilities that are indicated in the LISP header by setting the N, E, and the V bit respectively.

When the P-bit and the N-bit are set to 1, the Nonce field is the middle 16 bits.

When the P-bit and the V-bit are set to 1, the Version field is the middle 16 bits.

When the P-bit is set to 1 and the N-bit and the V-bit are both 0, the middle 16-bits are set to 0.


This document defines the following Next Protocol values:

0x1 : IPv4

0x2 : IPv6

0x3 : Ethernet

0x4 : Network Service Header [RFC8300]

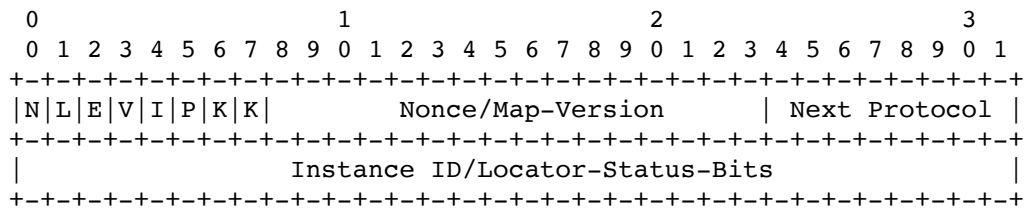

LISP-GPE Header

4. Backward Compatibility

LISP-GPE uses the same UDP destination port (4341) allocated to LISP.

The next Section describes a method to determine the Data-Plane capabilities of a LISP ETR, based on the use of the "Multiple Data-Planes" LCAF type defined in [RFC8060]. Other mechanisms can be used, including static xTR configuration, but are out of the scope of this document.

When encapsulating IP packets to a non LISP-GPE capable router the P


bit MUST be set to 0.

A LISP-GPE router MUST not encapsulate non-IP packets to a non LISP-GPE capable router.

4.1. Use of "Multiple Data-Planes" LCAF to Determine ETR Capabilities

The LISP Canonical Address Format (LCAF) [RFC8060] defines the "Multiple Data-Planes" LCAF type, that can be included by an ETR in a Map-Reply to encode the encapsulation formats supported by a given RLOC. In this way an ITR can be made aware of the capability to support LISP-GPE on a given RLOC of that ETR.

The "Multiple Data-Planes" LCAF type, as defined in [RFC8060], has a Reserved-for-Future-Encapsulations 25-bit field. This document defines the least significant bit of that field as g bit (bit 24 in the third 32-bit word of the LCAF).

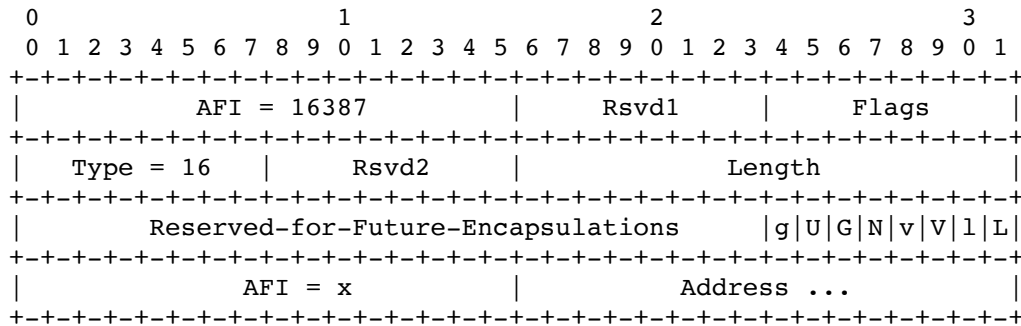

Multiple Data-Planes LCAF Type

g Bit: The RLOCs listed in the AFI-encoded addresses in the next longword can accept LISP-GPE (Generic Protocol Extension) encapsulation using destination UDP port 4341

All other ~~fields~~ **fields**: As defined in [RFC8060]

4.2. Type of Service

When a LISP-GPE router performs Ethernet encapsulation, the inner 802.1Q [IEEE8021Q] priority code point (PCP) field MAY be mapped from the encapsulated frame to the Type of Service field in the outer IPv4 header, or in the case of IPv6 the 'Traffic Class' field

4.3. VLAN Identifier (VID)

When a LISP-GPE router performs Ethernet encapsulation, the inner header 802.1Q [IEEE8021Q] VLAN Identifier (VID) MAY be mapped to, or used to determine the LISP Instance ID field.

5. IANA Considerations

IANA is requested to set up a registry of LISP-GPE "Next Protocol". These are 8-bit values. Next Protocol values in the table below are defined in this document. New values are assigned via Standards Action [RFC5226]. **The protocols that are being assigned values do not themselves need to be IETF standards track protocols.**

Next Protocol	Description	Reference
0	Reserved	This Document
1	IPv4	This Document
2	IPv6	This Document

3	Ethernet	This Document
4	NSH	This Document
5..255	Unassigned	

6. Security Considerations

LISP-GPE security considerations are similar to the LISP security considerations and mitigation techniques documented in [RFC7835].

With LISP-GPE, issues such as data-plane spoofing, flooding, and traffic redirection may depend on the particular protocol payload encapsulated.

7. Acknowledgements and Contributors

A special thank you goes to Dino Farinacci for his guidance and detailed review.

This WG document originated as draft-lewis-lisp-gpe; the following are its coauthors and contributors along with their respective affiliations at the time of WG adoption. The editor of this document would like to thank and recognize them and their contributions. These coauthors and contributors provided invaluable concepts and content for this document's creation.

- o Darrel Lewis, Cisco Systems, Inc.
- o Fabio Maino, Cisco Systems, Inc.
- o Paul Quinn, Cisco Systems, Inc.
- o Michael Smith, Cisco Systems, Inc.
- o Navindra Yadav, Cisco Systems, Inc.
- o Larry Kreeger
- o John Lemon, Broadcom
- o Puneet Agarwal, Innovium

8. References

8.1. Normative References

[I-D.ietf-lisp-rfc6830bis]
Farinacci, D., Fuller, V., Meyer, D., Lewis, D., and A. Cabellos-Aparicio, "The Locator/ID Separation Protocol (LISP)", draft-ietf-lisp-rfc6830bis-12 (work in progress), March 2018.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

[RFC6834] Iannone, L., Saucez, D., and O. Bonaventure, "Locator/ID Separation Protocol (LISP) Map-Versioning", RFC 6834, DOI 10.17487/RFC6834, January 2013, <<https://www.rfc-editor.org/info/rfc6834>>.

8.2. Informative References

~~[I-D.ietf-lisp-rfc6830bis]~~

~~Farinacci, D., Fuller, V., Meyer, D., Lewis, D., and A. Cabellos-Aparicio, "The Locator/ID Separation Protocol (LISP)", draft-ietf-lisp-rfc6830bis-12 (work in progress), March 2018.~~

- [RFC5226] Narten, T. and H. Alvestrand, "Guidelines for Writing an IANA Considerations Section in RFCs", RFC 5226, DOI 10.17487/RFC5226, May 2008, <<https://www.rfc-editor.org/info/rfc5226>>.
- [RFC7348] Mahalingam, M., Dutt, D., Duda, K., Agarwal, P., Kreeger, L., Sridhar, T., Bursell, M., and C. Wright, "Virtual eXtensible Local Area Network (VXLAN): A Framework for Overlaying Virtualized Layer 2 Networks over Layer 3 Networks", RFC 7348, DOI 10.17487/RFC7348, August 2014, <<https://www.rfc-editor.org/info/rfc7348>>.
- [RFC7835] Saucez, D., Iannone, L., and O. Bonaventure, "Locator/ID Separation Protocol (LISP) Threat Analysis", RFC 7835, DOI 10.17487/RFC7835, April 2016, <<https://www.rfc-editor.org/info/rfc7835>>.
- [RFC8060] Farinacci, D., Meyer, D., and J. Snijders, "LISP Canonical Address Format (LCAF)", RFC 8060, DOI 10.17487/RFC8060, February 2017, <<https://www.rfc-editor.org/info/rfc8060>>.
- [RFC8300] Quinn, P., Ed., Elzur, U., Ed., and C. Pignataro, Ed., "Network Service Header (NSH)", RFC 8300, DOI 10.17487/RFC8300, January 2018, <<https://www.rfc-editor.org/info/rfc8300>>.

Authors' Addresses

Fabio Maino (editor)
Cisco Systems
San Jose, CA 95134
USA

Email: fmaino@cisco.com

John Lemon
Broadcom
~~3151 Zanker Road~~
270 Innovation Drive
San Jose, CA 95134
USA

Email: john.lemon@broadcom.com

Puneet Agarwal
Innovium
USA

Email: puneet@acm.org
Darrel Lewis
Cisco Systems

Email: darlewis@cisco.com

Michael Smith
Cisco Systems

Email: michsmit@cisco.com